


LS-NB12201M HD H.265 1080P IP Camera

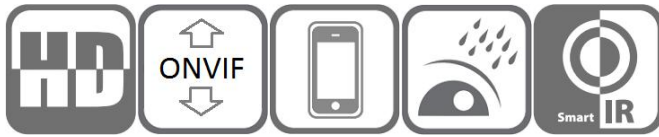

Features:

- ❖ 1/2.8" CMOS sensor
- ❖ HD resolution 1920*1080P
- ❖ Low bit stream, Increase storage time
- ❖ Motion Detection, Privacy Mask, Mirror
- ❖ RTSP and Onvif 2.6 compatible
- ❖ H.265/H.264 dual-stream media server
- ❖ Easy-to-use P2P Cloud service
- ❖ Multi web browser, PC Client, mobile APP remote access
- ❖ Lightning protection 4000V
- ❖ Strong water-proof housing, IP66
- ❖ 24 pcs IR Leds, IR distance 30 meters
- ❖ 2.7-13.5mm motorized lens
- ❖ Support POE 48V

Technical Specifications:

Model	LS-NB12201M
Camera	
Image Sensor	1/2.8" IMX307 CMOS
Effective Pixels	1920(H)×1080 (V)
Image Quality	Brightness setting, Saturation setting, Sharpness setting, Contrast setting, Backlight compensation setting, Strong light suppression, etc.
Min. Illumination	0.01Lux@F1.2(AGC ON)
Day/Night	Auto/Color/(B/W)/Timing
White Balance	Auto/Indoor/Outdoor
DNR	2D/3D DNR
Other	Motion Detection, Privacy Mask, Mirror, Flip
Encode	
Embedded Solution	SSC325
Video Standard	H.265/H.264 Double code
Video Resolution	Main stream: 1080P@25fps / 720P/D1@30fps Sub stream: 360P/CIF@30fps
Video Bitrates	500Kbps -4Mbps, VBR/CBR

Audio Standard	G.711-u
IR Led	
IR Led	24 pcs IR Leds
IR Distance	30M
Lens	
Focal length	2.7-13.5mm motorized lens
Zoom	4X
Optional Function	
Audio, etc.	
Network Services	
Protocol	RTSP/FTP/PPPOE/DHCP/DDNS/NTP/UPnP
P2P	Yes
Web	IE , Firefox, etc.
Media	CMS, Android, IOS
ONVIF	2.6 compatible
General	
Network Port	1-RJ45, 100Mbps
Power Supply	Support POE 48V& 12 VDC ± 10%
Power Consumption	< 9 W
Operating Temp.	-30℃-(+60)℃, 10%-90%RH

*This statement is subject to change witho ut notice